

features

- Single or dual inputs
- DIN rail mounting option
- Surface mounting option
- Tri-colour LED status indication
- Built-in short circuit isolators
- Visible address selector switches
- LED status visible in 2 planes
- Plug in connectors
- Approved to GEA GEI 1-082 and CEA GEI 1-084

The MI-DMMI and MI-DMM2I monitor modules are used with the Morley-IAS intelligent fire alarm control panels to provide a single or dual input circuit from external devices.

Each input is continuously monitored for normal, open circuit and alarm conditions. Changes to the status of the input circuits are communicated to the panel where the appropriate actions may be undertaken.


The MI-DMMI requires a single address and the MI-DMM2I two addresses of the ninety-nine possible module addresses available on a loop. It responds to regular polling from the control panel indicated by a pulsing LED every successful communication.

The MI-DMMI and MI-DMM2I use a unique mechanical design allowing each module to be mounted either in a wall box (M200E-SMB) or on a DIN rail (using M200E-DIN). Irrespective of the mounting method chosen, the address switch is both visible and accessible for selection. To help engineers in the maintenance and fault finding process, both the LEDs and the address switches can be viewed without having to remove the cover of the mounting box. The LEDs, being multi colour, provide diagnostic information regarding the status of the output. For ease of installation, testing and maintenance, the field wiring terminals are of a plug in design.



A Honeywell Company

MI-DMMI MI-DMM2I Addressable Monitor Modules Data Sheet

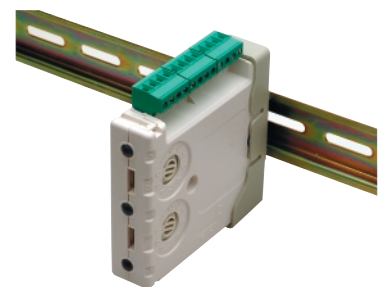


We reserve the right to amend any design or specification in line with our policy of continuing development and improvement. © Morley-IAS Fire Systems

mechanical

electrical


Dimensions (H x W x D) 93 x 94 x 23 (mm)
 Weight MI-DMMI 100g
 MI-DMM2I 110g
 Operating Temperature -20 °C to +60 °C
 Humidity 0 to 95% maximum non-condensing

Operating voltage 15 to 30 Vdc
 Standby current
MI-DMMI
 No comms 310µA at 24 Vdc maximum
 1 comms every 5 seconds with LED blink 510µA at 24 Vdc maximum
MI-DMM2I
 No comms 340µA at 24 Vdc maximum
 1 comms every 5 seconds with LED blink 600µA at 24 Vdc maximum
 Terminal Wire 2.5 mm² maximum

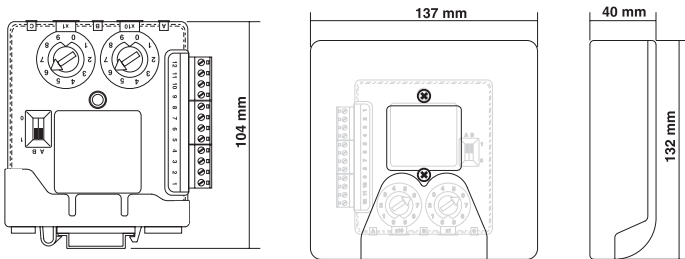


part numbers

MI-DMMI Single channel addressable input module
MI-DMM2I Dual channel addressable input module

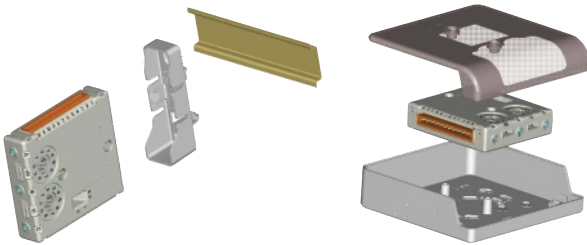

accessories

M200E-SMB Surface mounting box
M200E-DIN DIN rail mounting clip

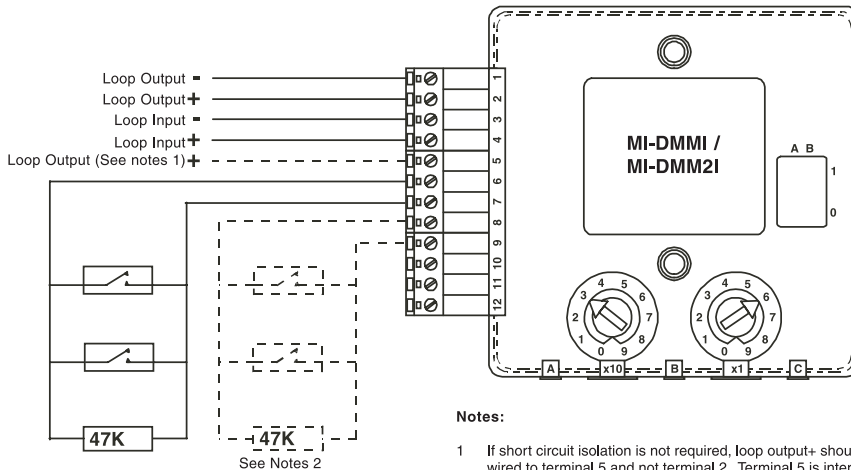

Notes:

- 1 If short circuit isolation is not required, loop output+ should be wired to terminal 5 and not terminal 2. Terminal 5 is internally connected to terminal 4.
- 2 The dashed line circuit connected to terminals 8 and 9 should only be used with the MI-DMM2I. There are no connections to these terminal on the MI-DMMI.
- 3 Provided the control panel is compatible, short circuit monitoring of the input circuit may be possible. An 18k Ohms resistor should be wired in series with each device switch being monitored.